

MFX_4 TERMINAL PRO TOUCH IP20

The high-performance MFX_4 system-based flow computer meets the highest standards for flexible and reliable Office of Weights and Measures testing, for mixing and for the control of processes in liquid handling, particularly for petroleum products. With more than 30 years of operational experience and 18,000 installations, the fourth generation combines long-standing industry experience with state-of-the-art technology and uses communication standards that have never before been applied to industrial flow computers.

MFX_4 TERMINAL PRO TOUCH IP20

The MFX_4 Terminal PRO TOUCH IP20 is the extended version of the man-machine interface (MMI) of the MFX_4 device family for use in non-hazardous areas. It is used for communication with the MFX_4 Controller, other suitable system participants or connected host systems such as SCADA or TAS systems.



↑ MFX_4 Terminal PRO TOUCH IP20

Because of the wide variety of different protocols and communication standards they support, all MFX_4 systems can be easily integrated, quickly configured and serviced remotely while in operation. In order to substantially expand the range of application options, the MFX_4 system-based flow computer sets itself apart with its distributed architecture consisting of centralised processing units and decentralised control units.

In order to ensure optimal ease of use, all versions of the MFX_4 Terminal Pro Touch are equipped with a configurable graphic, high-contrast and full-colour display. It also offers multilingual user guidance and the display of all process data of the attached system.

The MFX_4 Terminal PRO TOUCH IP20 meets the high requirements for readability in difficult operating environments with its graphical 10.4" colour display and the ability to display process data in different font sizes.

The heavy-duty weatherproof touch screen of the MFX_4 Terminal PRO TOUCH IP20 is also equipped with freely assignable keys and is suitable for heavy industrial use. This allows the display to be individually configured for a wide range of applications.

With the direct support of the MFX_4 RFID card reader, its TCP/IP connection and the optionally available control inputs and control outputs, the MFX_4 Terminal PRO TOUCH IP20 is also ideally equipped for serve as a separate access control for the entrance and exit gate in the loading terminal, for example.




MFX_4 TERMINAL PRO TOUCH IP20

TECHNICAL DATA / FEATURES

| | |
|----------------------------------|--|
| Housing | <ul style="list-style-type: none"> B 288,4 mm x H 191,4 mm x T 76,5 mm, front - black anodised aluminium, body - galvanised steel |
| Protection class | <ul style="list-style-type: none"> IP20 up to IP65 [depending on installation housing] |
| Weight | <ul style="list-style-type: none"> 2 kg |
| Operating temperature | <ul style="list-style-type: none"> -20 °C ... +40 °C [extended temperature range on request] |
| Storage temperature | <ul style="list-style-type: none"> -25 °C ... +75 °C |
| Supply voltage | <ul style="list-style-type: none"> 24 VDC \pm10 % P_{typ} = 15 W P_{max} = 40 W |
| Display | <ul style="list-style-type: none"> Large graphic colour display, XGA (1024 x 768 pixel) LED backlight Automatic contrast adjustment |
| Touch panel | <ul style="list-style-type: none"> Resistive (weatherproof) |
| Card reader | <ul style="list-style-type: none"> Supporting the external card reader MFX_4 RFID Transponder [Proximity] 13,56 MHz |
| Interfaces | <ul style="list-style-type: none"> 1 x CAN-Bus 1 x RS232 1 x RS485 [on request] 1 x Ethernet [TCP/IP] |
| Protocols | <ul style="list-style-type: none"> CANopen MODBUS RTU MODBUS TCP OPC [via separate software license] |
| Inputs/Outputs | <ul style="list-style-type: none"> 4 x Digital inputs (galvanically isolated) 4 x Digital outputs (galvanically isolated) Auxiliary voltage 12 VDC (galvanically isolated) I_{max} = 150 mA |
| Multi language capability | <ul style="list-style-type: none"> German, English, French, Spanish, Polish, Russian, Hungarian, Slovakian (Other languages on request) |

MFX_4 TERMINAL PRO TOUCH IP20

DIMENSIONS

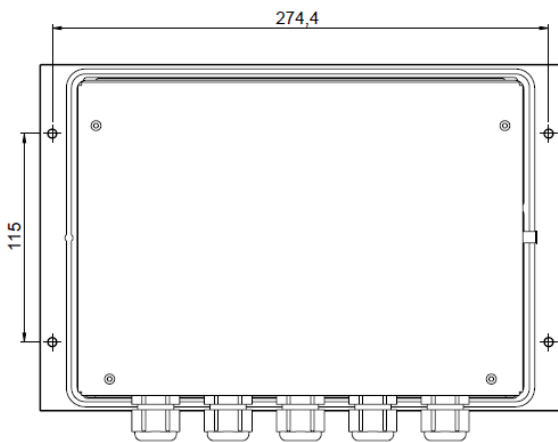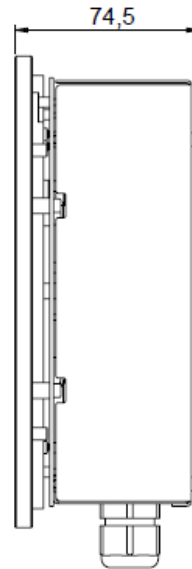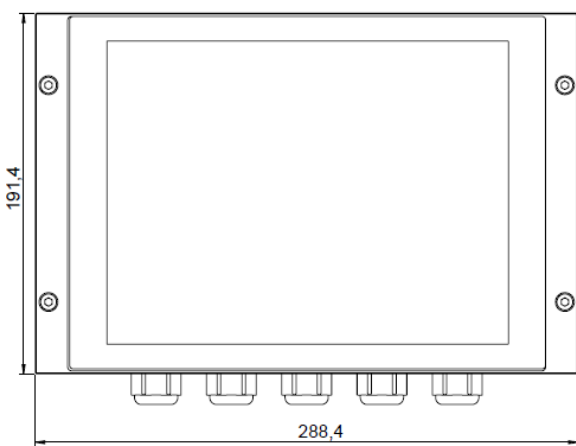

* Dimensions are given in millimeters
Installation template available on request